

NU-JC Series


# NU-JC420B / 425B

420 W / 425 W

N-Type TOPCon

The Design Solution


Black Backsheet

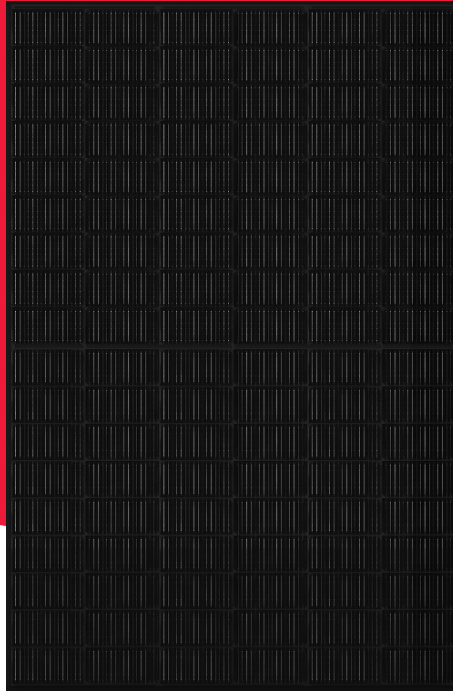



## Powerful product features


**+%** Guaranteed positive power tolerance (0/+5 %)

**MBB** MBB busbar technology  
Improved reliability  
Higher efficiency  
Reduced series resistance

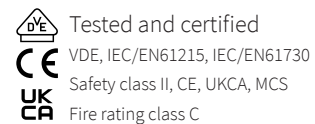 Tested and certified  
VDE, IEC/EN61215, IEC/EN61730  
Safety class II, CE, UKCA, MCS  
Fire rating class C

 High module efficiency  
21.51 / 21.76 %  
N-Type TOPCon monocrystalline silicon photovoltaic modules

 Half-cut cell  
Improved shading performance  
Lower internal losses

 Robust product design  
PID resistance test passed  
Salt mist test passed (IEC61701)  
Ammonia test passed (IEC62716)  
Dust and sand test passed (IEC60068)  
Hail resistance class 4 (40 mm hailstone)

## Your solar partner for life

**60 YEARS** 60 years of solar expertise

**30 YEARS** Linear power output guarantee

**25\* YEARS** Product guarantee

 Local support team in Europe

**50 MIL** 50 million PV modules installed

**1 TIER** Tier 1 - BloombergNEF



Energy Solutions

**SHARP**  
Be Original.

\* Applicable for modules installed within the EU and additional listed countries.  
Please check the guarantee conditions for your area before purchasing.

## Electrical data (STC)

		NU-JC420B	NU-JC425B	
Maximum power	$P_{max}$	420	425	$W_p$
Open-circuit voltage	$V_{oc}$	38.63	38.86	V
Short-circuit current	$I_{sc}$	13.86	13.93	A
Voltage at point of maximum power	$V_{mpp}$	32.34	32.52	V
Current at point of maximum power	$I_{mpp}$	12.99	13.07	A
Module efficiency	$\eta_m$	21.51	21.76	%

STC = Standard Test Conditions: irradiance 1,000 W/m<sup>2</sup>, AM 1.5, cell temperature 25 °C.  
 Rated electrical characteristics are within ±10 % of the indicated values of  $I_{sc}$ ,  $V_{oc}$  and 0 to +5 % of  $P_{max}$ .  
 Reduction of efficiency from an irradiance change of 1,000 W/m<sup>2</sup> to 200 W/m<sup>2</sup> ( $T_{module} = 25$  °C) is less than 3 %.

## Electrical data (NMOT)

		NU-JC420B	NU-JC425B	
Maximum power	$P_{max}$	315.07	318.55	$W_p$
Open-circuit voltage	$V_{oc}$	36.61	36.83	V
Short-circuit current	$I_{sc}$	11.24	11.29	A
Voltage at point of maximum power	$V_{mpp}$	30.15	30.31	V
Current at point of maximum power	$I_{mpp}$	10.46	10.51	A

NMOT = Nominal Module Operating Temperature: 42.5 °C, irradiance 800 W/m<sup>2</sup>, air temperature of 20 °C, wind speed of 1 m/s.

## Mechanical data

Length	1,722 mm
Width	1,134 mm
Depth	30 mm
Weight	20.7 kg

## Temperature coefficient

$P_{max}$	-0.300 %/°C
$V_{oc}$	-0.259 %/°C
$I_{sc}$	0.046 %/°C


## Limit values

Maximum system voltage	1,000 V DC
Over-current protection	25 A
Temperature range	-40 to 85 °C
Max. mechanical load (snow/wind)	2,400 Pa
Tested snow load (IEC61215 test pass*)	5,400 Pa

## Packaging data

Modules per pallet	36 pcs
Pallet size (L × W × H)	1.75 m × 1.13 m × 1.25 m
Pallet weight	Approx. 780 kg

## Dimensions (mm)

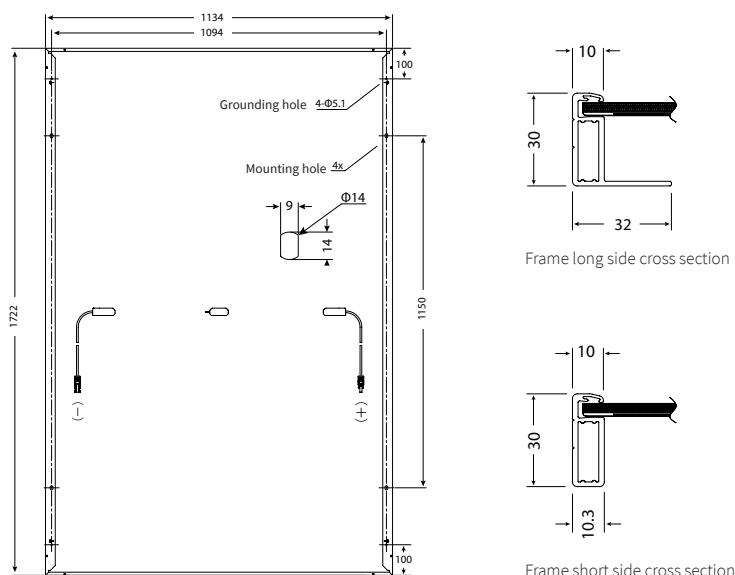

\*Please refer to SHARP's installation manual for details.

## General data

Cells	Half-cut cell mono, 182 mm x 91 mm, MBB, 2 strings of 54 cells in series
Front glass	Anti-reflective high transmissive low iron tempered glass, 3.2 mm
Frame	Anodized aluminium alloy, black
Backsheet	Black
Cable	∅ 4.0 mm <sup>2</sup> , length 1,250 mm
Connection box	IP68 rating, 3 bypass diodes
Connector	MC4 (Multi Contact, Stäubli), IP68

Note: Technical data is subject to change without prior notice. Before using SHARP products, please request the latest data sheets from SHARP. SHARP accepts no responsibility for damage to devices which have been equipped with SHARP products on the basis of unverified information. The specifications may deviate slightly and are not guaranteed. Installation and operating instructions are to be found in the corresponding handbooks, or can be downloaded from www.sharp.eu. This module should not be directly connected to a load.